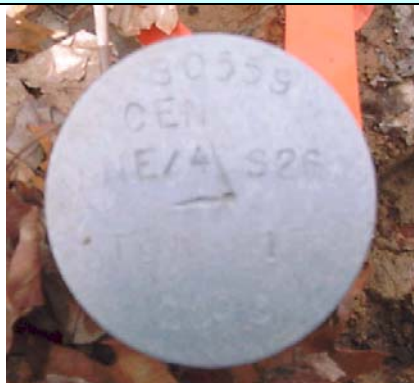


Index:	S-20	Corner:	NE1/16	LAND CORNER RECORD				State of Indiana Hoosier National Forest
Twnshp:	8N	Range:	1E	Section:	26	2 nd P.M.	County	Monroe
EXISTING SURVEYS								
Original Government Survey					Original Survey Evidence Found			
Year Surveyed:				By:				
Original Monument:				Date of Search:				By:
Species	Diameter	Bearing	Distance	Monument Found:				
				Species	Diameter	Bearing	Distance	
Subsequent Corner Restoration					Evidence of Subsequent Corner Restoration Found			
Where Filed or Recorded:				Year Searched:	3/27/2003	By:	Bob Stone	
Book:	Page:	Date:		Monument Found	A FS aluminum monument standing 7" above ground set by Bledsoe, Tapp and Riggert			
Monument Set:								
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance	

OTHER EVIDENCE

Describe corner loc. relative to nearby features & dir. to corner location; note fences, roads, etc. The monument is located on a steep north slope approximately 30 feet west of a steep drainage. A metal survey marker post is 0.6 feet north.	Sketch of Monument 
---	--

PERPETUATION RECORD

Monument: Describe new monument set or work done to perpetuate/preserve the existing monument/position.								
								
Corner Diagram		Accessories: Describe new BTs & witness objects established to perpetuate existing evidence.						
		Bearing Trees established by Bledsoe, Tapp and Riggert with tags, blazes and scribed:						
		T.Poplar	Maple	Beech				
		18"	4"	34"				
		S 86° E	N 40° W	S 75° W				
		13.3 Ft.	9.0 Ft.	29 Ft.				
		Corner Recordation:		Certificate Prepared:				
		Filed and Recorded in County records:		Date:				
		Book:		Page:				
		Geodetic Coordinates:		Lat./N.	Long./E.			
		Edited By:		Robert J. Stone		Date Created:		3/27/2003
Section:		26						

Referenced on BTR survey recorded as InstNo.2003003392.

Accepted by the Monroe County Surveyor Review Board on August 6, 2019.